

Antenna guide for EU installations Generation 2 meters

Meter

flowIQ® 2200/3200
Meters without wired output

1
2




flowIQ® 2200/3200/4200
Meters with wired output

3




Installation


1

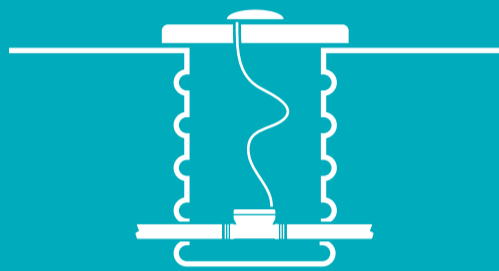

2

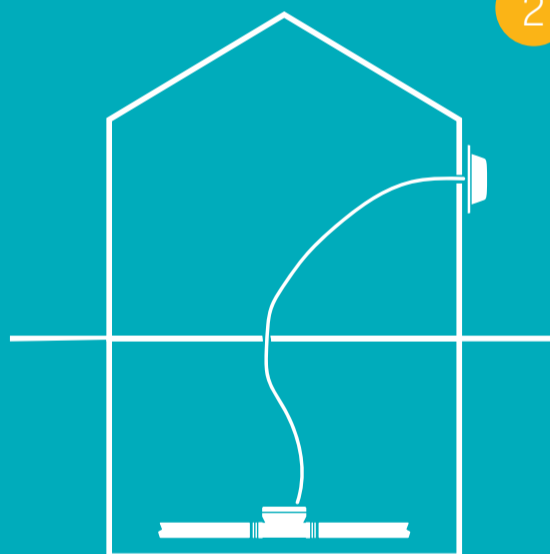

3

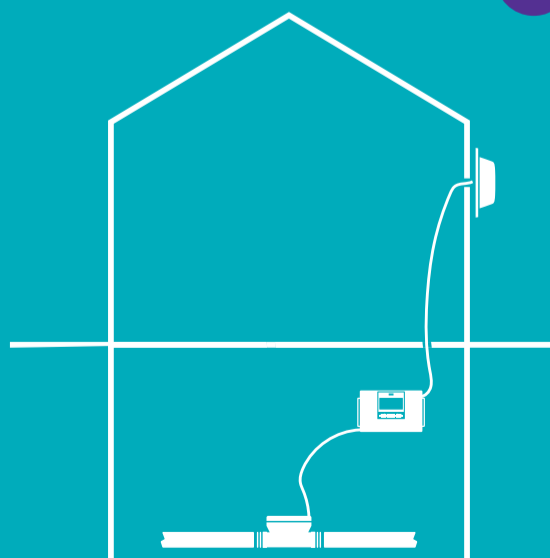



Antennas/ accessories

Kamstrup Pit Antennas

Wireless M-Bus/linkIQ®/LoRaWAN


-  **Pit Antenna II**
66-97-926 (2 m cable)
66-97-929 (7.5 m cable)
-  **Coupler only**
30-26-1304
-  **1 coupler + 1 SMA connector**
66-97-927 (30 cm cable)

NB-IoT

-  **Pit Antenna**
66-99-669 (2 m cable)
66-66-670 (7.5 m cable)
-  **Click-on Antenna**
66-99-663 (Is included when ordering the meter)


Kamstrup Wall Antennas

Wireless M-Bus/linkIQ®/LoRaWAN


-  **Mini Triangle Antenna**
66-99-448 (2.5 m cable MCX-connector)
66-99-484 (1.5 m cable SMA-connector)
68-80-013 (0.1 m cable SMA-connector)

-  **Coupler only**
30-26-1304


NB-IoT

-  **NB-IoT Wall Antenna**
66-99-666 (2 m cable)
66-99-668 (7.5 m cable)


Kamstrup flowIQ® Gateway*

-  **Cable for flowIQ® Gateway**
50-00-491 (1.5 m)
50-00-493 (7.5 m)

Wireless M-Bus/linkIQ®

-  **Mini Triangle Antenna**
66-99-448 (2.5 m cable MCX-connector)
66-99-484 (1.5 m cable SMA-connector)
68-80-013 (0.1 m cable SMA-connector)

NB-IoT

-  **NB-IoT Wall Antenna**
66-99-666 (2 m cable)
66-99-668 (7.5 m cable)

*flowIQ® Gateway is only compatible with:

- flowIQ® 2200 with wM-Bus/linkIQ® 61/62
- flowIQ® 3200 with wM-Bus/linkIQ® 63/64
- flowIQ® 4200 with wM-Bus/linkIQ® 65

Antenna guide for EU installations Generation 1 meters

Meter

MULTICAL® 21



flowIQ® 2200
(KWM2210)






NOTE: The antenna solutions are not available for KWM2230 and KWM3230

flowIQ® 3100



Installation

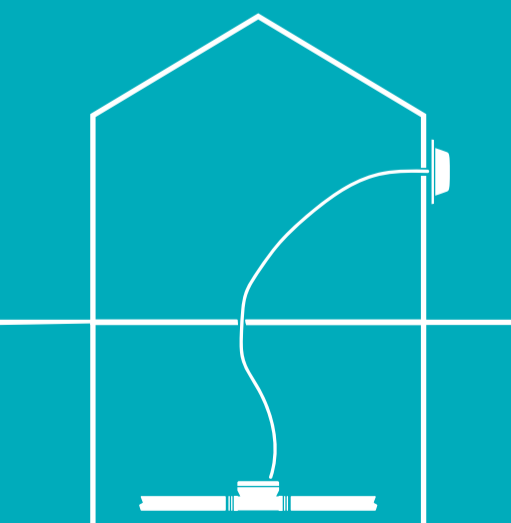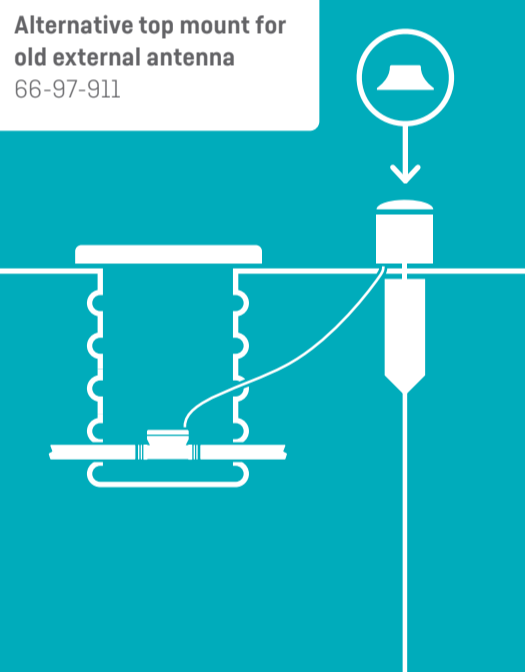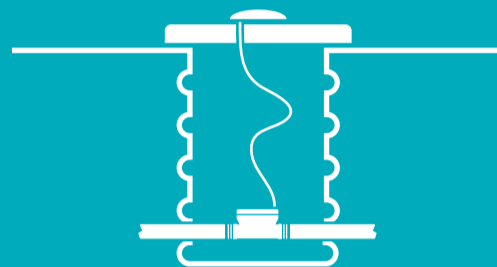

Antennas/ accessories

Kamstrup Pit Antenna II



Part number
66-97-900 [2 m cable]

Country specific
EU

Doc. / Installation & User Guide
55122115

Frequency (Mode: C1 + T1 OMS)
868

Kamstrup Pit Antenna II
with Antenna Mount



Part number
66-97-900 [2 m cable]

Antenna Mount
Part number
66-97-906 [Earth spear,
bottom, screws]

Spear parts
66-97-907 [Bottom]
66-97-910 [Earth spear]

Accessories
66-97-908 [Tool kit for
installation]
66-97-911 [Top for antenna
type 66-97-143]

Kamstrup Mini Triangle



Antenna
68-80-013 [0.1 m cable SMA
connector]
66-99-484 [1.5 m cable SMA
connector]

Cable
50-00-429 [5 m]
50-00-441 [10 m]
50-00-442 [15 m]
50-00-443 [20 m]
50-00-444 [25 m]

Coupler with SMA connector
50-00-445 [30 cm cable]

Frequency (Mode: C1 + T1 OMS)
868 / 900 / 1800 / 1900 / 2100